



ROOF BAG 320L : MP6639

INSTRUCTION MANUAL



Please read this instruction manual before fitting your roof bag to your vehicle. Follow these instructions carefully and keep for future reference.

WARNING – GENERAL SAFETY

- This roof bag is designed for use with roof bars only. The attachment of this roof bag to a vehicle is safety critical & beyond the control of the manufacturer. The user must therefore ensure that this roof bag is suitable for use with their particular vehicle & roof bars.
- Maximum load capacity is 50kg – **DO NOT OVERLOAD.**
- Ensure the roof bag is securely fixed to roof bars using the fixings provided.
- Ensure all fixings are checked for tightness at regular intervals before and during travel.
- Do not use if parts are missing, worn or damaged
- The zipped opening should always be at the rear of the roof bag.
- Ensure the zipped opening is fully closed with the external straps adjusted & securely tensioned before starting any journey.
- To avoid potential damage to the vehicle's paintwork caused by excess material in the wind, make sure any loose straps are securely tied off.
- Avoid removing the bag from the roof whilst it is fully loaded.
- If using stepladders or a platform to fit this roof bag you will be working at height & should carefully follow the stepladder / platform manufacturer's safety instructions. You should not attempt to fit the roof bag from the ladder but only to use the ladder if required to assist people on the ground.
- Ensure cargo is evenly distributed & secured using the internal cargo straps provided before starting any journey.
- Be aware of the additional height of the vehicle with the roof bag fitted, eg at low bridges.
- Be aware of cross winds and moderate your speed when driving with the roof bag fitted.
- Although this bag is made from waterproof material it is advised that cargo should be packed into plastic bags in extreme weather conditions.


ROOF BAR SPECIFICATIONS

- This roof bag is suitable for all shapes of roof bars with a maximum width of 80mm and a maximum height of 45mm.
- Minimum roof bar spacing 660mm. Maximum roof bar spacing 820mm

CARE OF YOUR ROOF BAG

- Allow material to dry completely before storing in the bag provided.
- Remove dirt with a soft sponge and warm water. DO NOT use detergent.
- DO NOT expose to sparks, flames or other sources of ignition.

CONTENTS

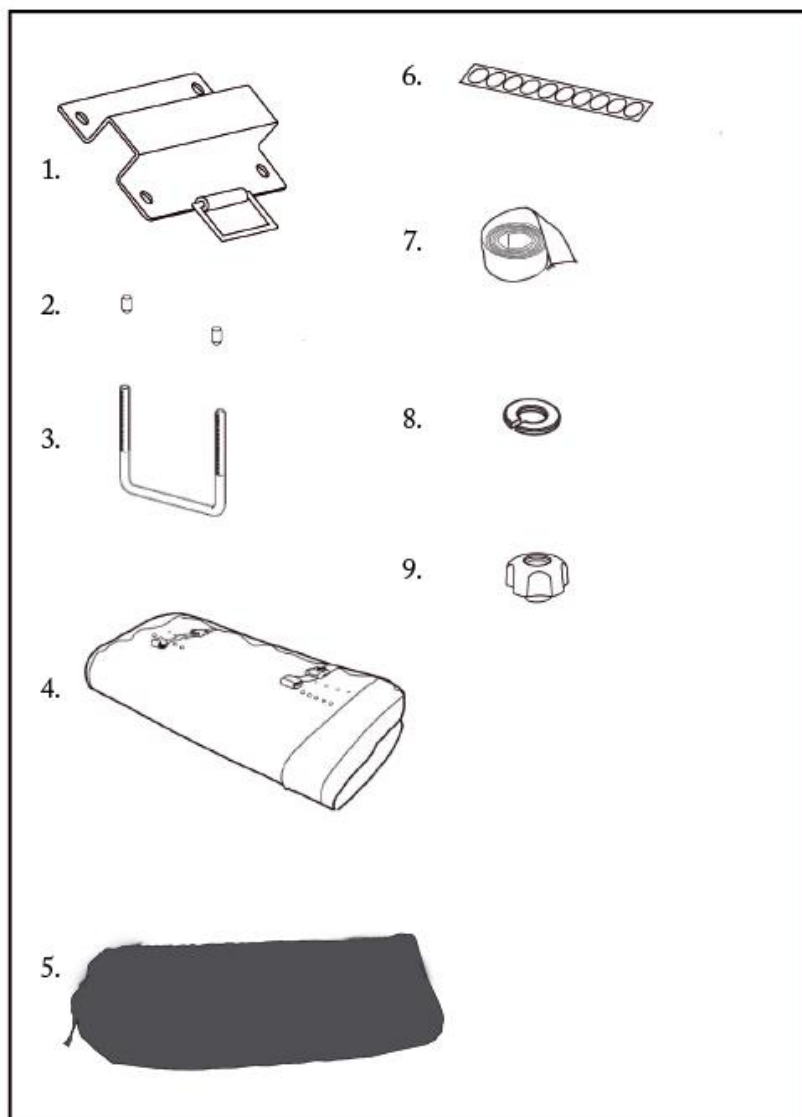

- 1 Fixing Plate x 4
- 2 Protective caps x 16
- 3 U-Bolts x 8
- 4 Roof Bag x 1
- 5 Storage bag x 1
- 6 Adhesive stickers x 2
- 7 Internal cargo straps x 2
- 8 Washers x 16
- 9 Thumb wheels x 16

FITTING INSTRUCTIONS

- 1). With the zipped opening to the rear, carefully place the foldable roof bag on top of your vehicle's roof bars, ensuring it is centrally positioned. Fully open the top so that the base is accessible from the inside.
- 2). Position the base of the roof bag so that the eyelets are located either side of the roof bars. Please note – your roof bars may need to be re-positioned to achieve this.
- 3). From the underside of the base, pass the threaded arms of a U-Bolt through a pair of eyelets located on either side of the roof bar. Repeat this with a second U-bolt so that there are 2 U-bolts passing around the roof bar, with their 4 threaded arms passing through the eyelets adjacent to the supporting rail in one corner within the roof bag. **See Fig 1.**
- 4). With the loops for the cargo straps on the inboard side, align and fit a fixing plate over the 4 U-Bolt threaded arms and the supporting rail.
- 5). Fit a washer and thumbwheel onto each U-bolt threaded arm. Loosely tighten each thumb wheel with enough force to ensuring the fixing plate is correctly located.
- 7). Fit a protective cap onto the end of each U-Bolt threaded arm. **See Fig 2**
- 8). Repeat these steps to securely attach the remaining 3 fixing plates to the other 3 corners in the base of the roof bag.
- 9). Readjust the roof bag so its base is fully flat and it is central on the roof bars.
- 10). Fully tighten the thumb wheels with approx 4Nm pressure, ie enough to ensure that the fixing plates & ubolts clamp the roof bag's supporting rails to the roof bars so that they cannot move during your journey.
- 11). Cover all un-used eyelets with the round adhesive stickers provided.
- 12). Use the 2 internal cargo straps provided to secure your cargo in transit.
- 13). Close the top of the roof bag and securely zip together. Do not overfill your roof bag as this will exert excessive strain on the zips.
- 14). Adjust & fully tension the external straps. **See Fig 3**

15). Check the load and all fixings are secure before starting your journey. See Fig 4

Fig 1



Fig 2



Fig 3



Fig 4



TECHNICAL SPECIFICATION

Volume	320L
Max Load Capacity	50kg
External Dimensions	105cm (L) x 80cm (W) x 40cm (H)
Product Weight	4.5kg

Signature

Technical Manager Maypole Ltd December 2018

Email: sales@maypoleltd.co.uk
Web: www.maypole.ltd.uk